

B22 PLUG IN ROTATING HALOGEN BEACON

Amber. Polycarbonate Lens. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.

B22.00/.12V/.24V



Less bulb (.LB) versions available .12LB or .24LB

Specify voltage when ordering.

Use with 13109 series fixing socket (not supplied with beacon) see page 29.

Spare Parts

- 10514.00 Amber Lens.
- 27031 Bulb Retaining Clip.
- H448 12V (55W) Halogen Bulb.
- H466 24V (70W) Halogen Bulb.



322 PLUG IN ROTATING HALOGEN BEACON

Amber. Polycarbonate Lens. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.


322.00.LB/.12V/.24V

Specify voltage when ordering.

Use with 13109 series fixing socket (not supplied with beacon) see page 29.

Spare Parts

- 10398.00 Amber lens.
- 15244.00 Drive belt.
- 20378.00 Reflector.
- 27031 Bulb Retaining Clip.
- 29211.00 PCB Assembly.
- 13204.00 Motor Module Assembly.
- H448 12V (55W) Halogen Bulb.
- H466 24V (70W) Halogen bulb.

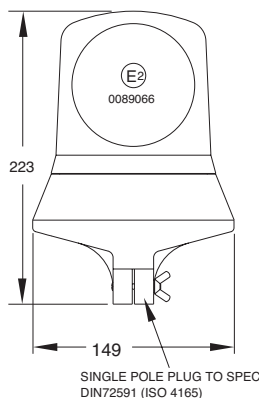

372 PLUG IN ROTATING HALOGEN BEACON

Amber. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.


372.00.LB/.12V/.24V

Specify voltage when ordering.

Use with 13109 series fixing socket (not supplied with beacon) see page 29.

Spare Parts

- 10240 Amber Lens.
- 15214 Drive Belt.
- 27031 Retaining Clip.
- 20285.8 Reflector.
- 13162.00 Motor Module.
- H448 12V(55W) Halogen Bulb.
- H466 24V(70W) Halogen Bulb.

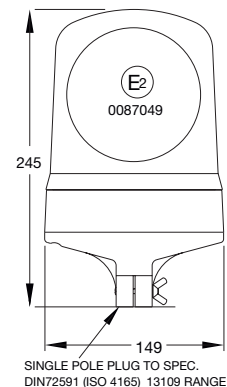

For Plug-In Beacons.
Please use **13109** series mounting stems.
See page 29.